

Optimizing Plasma Cutting Parameters for Thin Mild Steel Sheets of Various Thicknesses

Andiboyina Sireesha^{1*}, D. Rupesh², K. Niranjan Kumar³, K. Abhiram⁴

Abstract

Plasma machining was investigated for suitability to cut thin sheets and the quality obtained was assessed. The main objective of this investigation is to machine or cut required Mild steel sheet thicknesses and to determine the surface roughness and MRR values. Traditional cutting techniques have been discovered to be costly in terms of both time and resources. This study may be valuable to car converters, such as firms that make wheelchair-accessible automobiles or other analogous companies where the use of traditional cutting technologies is still common. In turn, a robotic plasma cutter would be a practical solution. In this experiment, mild steel with a thickness range of 3 mm to 5 mm and materials of different compositions had been cut using a plasma cutter with a controlled torch height correction. Tests were carried out by varying the plasma parameters like cutting speed, pressure, and intensity.

Keywords: Plasma cutting Machine, Cutting Speed, MRR, Material, mild steel

INTRODUCTION

Materials with a substantial amount of hardness and hardness or materials that prove difficult to machine using a traditional machining method. If the part being cut is too flexible or thin can withstand the cutting pressures or if the design of the component is excessively intricate Arc Cut-Away in the PAC A section or space surrounds the electrode's circumference in the electron arc torch, between the inside radius of the torch tip or nozzle. The heating and disintegration of the plasma gas takes place in this chamber. The plasma gas's pressure and volume both significantly increase as the outcome of this heating. Up to 30,000 degrees Fahrenheit (16,000 degrees Celsius) and 6000 meters per second (20,000 feet per second), the plasma gas enters the torch's nozzle or tip at extreme speeds and heat. Arc Cut-Away PAC The area between the circumference of the torch tip or nozzle and the outer diameter of the electrode are separated by a space or region in the plasma arc torch. The plasma vapor is heated and ionized in this chamber. Plasma gas dramatically rises in volume and pressure because of this scorching. Up to 30,000 degrees Fahrenheit (16,000 degrees Celsius) and 6000 m/s (20,000 ft/s), plasma gas comes out from the constricted orifice of the torch's nozzle or tip at extremely fast speeds and temperatures. However, the suitability of plasma to process thin sheets without altering the material was a concern. The conventional material thickness used when cutting with plasma is medium or thick range. The technique is cost effective and obtains good quality results when used for thicknesses in the range between 5 and 40 mm [1–5].

*Author for Correspondence

Andiboyina Sireesha
E-mail: sireesha.andiboyina04@gmail.com

¹Assistant Professor, BITS Vizag, Mechanical Engineering, Visakhapatnam, Andhra Pradesh, India

^{2,4}Student, BITS Vizag, Mechanical Engineering, Visakhapatnam, Andhra Pradesh, India

Received Date: August 18, 2023

Accepted Date: September 02, 2023

Published Date: September 12, 2023

Citation: Andiboyina Sireesha, D. Rupesh, K. Niranjan Kumar, K. Abhiram. Optimizing Plasma Cutting Parameters for Thin Mild Steel Sheets of Various Thicknesses. International Journal of Electro-Mechanics and Material Behavior. 2023;1(1): 23–28p

Yet an essential issue when using this procedure to cut thin material was a surface deformation as the outcome of the material's heat transport rate. Therefore, an optimal setting was essential to lessen this problem. Manufacturers do not usually offer the optimal settings needed to get the

optimum quality; therefore, analysis and research are often needed. According to several examinations, due to quality concerns, plasma was deemed undesirable for any thickness under 1 mm. Therefore, research into this issue was required to evaluate the technique for handling thin materials under 1 mm and supplanting mechanical tools. The aim of this work was to show that plasma machining can be used to cut well thin materials under 5 mm (in this example, 3 mm) with no alteration to the surface in addition to looking for ways to maximize the process to reduce the phenomena to their lower level. Automating processing of the underbody vehicle using plasma would be more efficient and rapid than using mechanical tools, so would solve all the issues [6].

PLASMA CUTTING:

Electrically conductive components are cut using the procedure known as plasma cutting or plasma arc cutting process, that utilizes a hot plasma jet. Plasma refers to a collection of charged particles that, being concentrated into a jet of ionized gas, can create temperatures above 0°C necessary to melt the material and run the cutting action. The plasma gets produced during the plasma-cutting process through a tiny opening and increasing the velocity so it can generate a jet and cut through the metallic substances under concern. Carbon steel, aluminum, stainless steel, copper, brass, Monel, cast iron, titanium, etc. are some of the materials that are frequently cut using the plasma cutting technique [7]. Automotive repair and remediation, industrial construction, fabrication businesses, and salvage and scrapping businesses commonly employ plasma cutting. Plasma cutting has many uses throughout the world because of its high precise cutting capability and rapid rapidity. The PAC process uses this high temperature, constricted, high velocity jet of ionized gas exiting from the constricting orifice of the torch tip to melt a much-localized area and remove the molten material from the metal being cut by the force of the plasma jet. The force of the arc pushes the molten metal through the work piece and serves the material. PAC offers extremely precise and clean cuts. Furthermore, when cutting thin gauge sheet metal depth, there is relatively restricted warping because of the heat energy's sharp focus [8].

PRINCIPLE OF CNC PLASMA ARC CUTTING:

This process uses a concentrated electrical arc which melts the material through a high-temperature plasma beam. All conductive materials can be cut. For cutting inert gas plates with depths ranging from 3 to 160 mm, plasma cutting electronics with cutting currents of 20 to 1000 amperes serve the purpose. For piercing light and high alloy steels, copper, magnesium, aluminum, and other metals and alloys, plasma gases included compressed air, oxygen, carbon dioxide, or argon/hydrogen [9].

The plasma arc process has always been seen as an alternative to the oxy-fuel process. In this part of the series the process fundamentals are described with emphasis being placed on the operating features and the advantages of the many process variants.

A water-cooled nozzle precisely confines the plasma. Densities of energy can be up to 2×10^6 w/cm with this.

It is feasible to get inside the charged particle beam. It expands at elevated temperatures and hurries at supersonic speed to work on the object (anode). According to the plasma beam's enormous kinetic energy and the ability to cut any electrically conducting substance at very rapid cutting speeds dependent on the substrate's thickness, temperatures inside the plasma arch are as high as 30,000 °C.

Stability of arc is another designation for the ideal state of a plasma arc. The arc's stability maintains the plasma jet's supposed shape. It might be produced by one of the one that follows: a) a plasma torch; b) a streaming jet; or c) water.

Temperature, electrical conductivity, plasma jet density, plasma beam diameter, and plasma beam focusing on nozzle output are all variables that need to be monitored.

Prior to beginning the blade-cutting operation, a pilot arc is started by high voltage over the cathode and nozzle. By substantially ionizing the space between the radiant torch and the work piece, this low-energy pilot arc is prepared. The main arc will start functioning by autonomously increasing power when the pilot arc strikes the workpiece. The basic principle is that the arc formed between the electrode and the work piece is constricted by a fine bore, copper nozzle. This increases the temperature and velocity of the plasma emanating from the nozzle. The temperature of the plasma is more than 20,000°C and the velocity can approach the speed of sound. When used for cutting, the plasma gas flow is increased so that the deeply penetrating plasma jet cuts through the material and molten material is removed in the efflux plasma.

Contrasting to the oxy-fuel process, which utilizes heat from an exothermic reaction to melt metal, the plasma furnace process uses an arc to melt metal. This is when the two processes vary from their counterparts. As a result, unlike the oxy-fuel process, the plasma approach can be used to cut metals that create refractory oxides, such as stainless steel, aluminum, cast iron, and non-ferrous alloys [10].

The power source needed for the plasma arc process needs to be high voltage and have a drooping characteristic. The open circuit voltage required to start the arc can be as high as 400V DC, even though the operating voltage to maintain the plasma is normally between 100 and 160V. The pilot arc is initially created between the electrode and the nozzle inside the torch's body. For cutting, the arc must be transferred to the work piece in the so-called 'transferred' arc mode. The electrode has a negative polarity and the workpiece a positive polarity so that most of the arc energy (approximately two thirds) is used for cutting.

Plasma is inert and can be produced using either argon, argon-H₂, or nitrogen in the traditional technique utilizing a tungsten electrode. However, oxidizing gases such as air or oxygen can be applied, as described in Process variations, but the electrode being utilized must be a copper with hafnium. The nozzle bore diameter and current level must be considered while adjusting the plasma gas flow, and both are crucial. The arc will burst and split into two arcs in series, electrode to nozzle and nozzle to workpiece, if the gas flow is too low for what is currently present, or the current level is too high for the nozzle bore dimension.

'Double arcing' typically has disastrous results, melting the nozzle. The plasma cut edge quality feels like that attained using the oxy fuel technique. The larger rate of melting toward the top of the metal, which results in top edge rounding, poor edge squareness, or a bevel on the cut edge, is an unusual feature of the plasma process, which cuts by melting. These restrictions depend on how tightly the arc has been limited, so several torch designs are available to improve arc constriction to produce more uniform heating at the top and bottom of the cut.

The main goals of the process improvements were to increase cutting speed, decrease noise and fumes, improve cut quality and arc stability. A specific electrode made of hafnium or zirconium placed in a copper holder by shearing is needed to replace the inert or uninspiring plasma-forming gas (argon or nitrogen) with air. Air can also be used to cool the flame over water. The fact that an air electric torch uses air rather than pricey gasses is a benefit. It should be noted that even though the only consumables are the electrode and nozzle, hafnium-tipped electrodes may prove more expensive over tungsten conductors.

This relatively new process differs from conventional, dry plasma cutting in that water is injected around the arc. The net result is greatly improved cut quality on virtually all metals, including mild steel. Currently, unheard-of applications, including cutting mild steel with several torches, are becoming normal thanks to developments in equipment design quality cut quality.

ADVANTAGES

Plasma cutting is exceptionally flexible. The cutter device can be made smaller than that it can be easily transported around between job sites as a handheld instrument. Also, new staff can pick up using a plasma chopping torch rapidly.

DISADVANTAGES

normally limited to a 50 mm (air-plasma) plate; noise when cutting thick portions; fume when sawing in the air; arc glare when cutting in the air; and costs associated with commodities (electrode and nozzle).

CNC PLASMA CUTTING MACHINE

A CNC plasma cutter is a machine that is specifically designed to cut through electrically conductive materials by using a computer to control and direct an accelerated jet of hot plasma at the material being cut. Steel, aluminum, brass, and copper are somewhat just a few of the materials that the CNC plasma cutters can cut through. They can also be used in many kinds of different industries, including fabrication and welding shops, auto repair and restoration places of confinement, industrial construction sites, and salvage operation destinations.

WORKING OF CNC PLASMA CUTTING MACHINE

Thermal cutting is an instrument used in the plasma cutting process. Which implies that compared to manually cutting the metal, it melts it using heat. The system's primary workings remain constant. Gases like nitrogen or compressed air serve a purpose in plasma cutters. Plasma can be generated by the ionization of these gases. In general, when compressed gases contact an electrode, they ionize and increase pressure. Plasma is forced toward the cutting tool as the pressure increases. A stream of plasma is produced by the cutting tip's confinement of the flow. The workpiece is then exposed to this. Due to the conductive properties of plasma, the workpiece is electrically connected to the support structure via the cutting table. As the plasma arc contacts the metal, its high temperature melts it. At the same time, the high-speed gases blow away the molten metal (Figures 1 to 8).



Figure 1. Plasma Machining

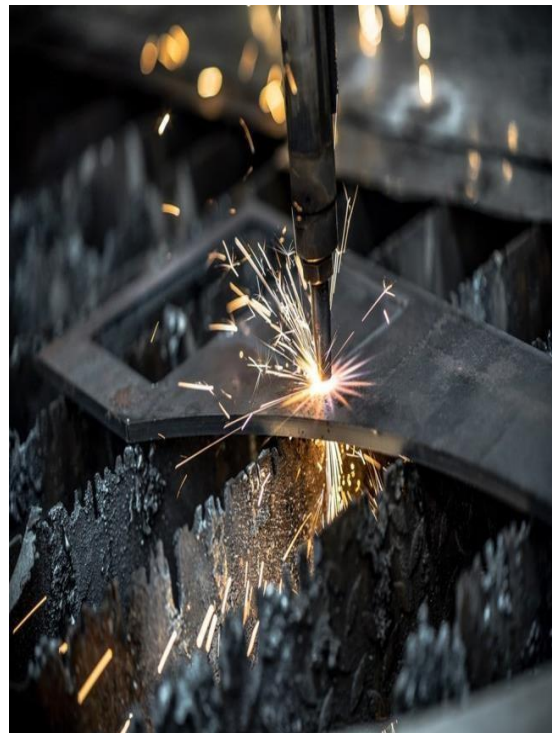


Figure 2: Working Principle of Plasma Machining



Figure 3. Before Machining.



Figure 4. After Machining.



Figure 5. Machining of mild steel.



Figure 6. Testing of machined specimens.



Figure 7. Surface Roughness testing.



Figure 8. Results of surface roughness.

CONCLUSION

- These works give an experimental investigation on the effect of cutting speed, gas pressure and intensity of plasma machined Mild Steel grade of like MS E250 and MSE350.
- Material removal rate (MRR) and surface roughness (Ra) can both be improved in the plasma beam machining process utilizing the input parameters, it has been established.
- The study of mild steel panels of two unique grades and varied layers of 3 to 8 mm is evaluated through modifying the values of the parameters that are input.
- Surface Roughness Ra = 0.587 for 3 mm has been chosen to be the ideal combination. 80 Amps 3 mm diameter for 150 mm pitch face at 100% CSMRR = 20.526283
- In comparison to other cutting processes, the PAC process yields fast cutting speeds with reasonable accuracy and surface quality.

REFERENCES

1. Y.M. Zhang & B. Zhang, (1999), "Observation of the Key holed uring Plasma Arc Welding", A WS Welding Research Supplement, pp 53–58.
2. Milan Kumar Das, Kaushik Kumar, Tapan Kr Barman, Prasanta Sahu (2014), "Optimization Of Process Parameters In Plasma Arc Cutting Of EN 31 Steel Based On MRR And Multiple Roughness Characteristics Using Grey Relational Analysis" *Procedia materials science*, vol. 5, pp. 1550–1559.
3. Abdulkadir Gullu, Umut Atici (2006), "Investigation Of The Effects Of Plasma Arc Parameters On The Structure Variation Of AISI 304 And St 52 Steels" *Materials and Design*, vol.27, pp. 1157–1162.
4. W. J. Xu, J. C. fang, Y. S. Lu (2002), "Study On Ceramic Cutting By Plasma Arc" *Journal of material processing technology*, vol.129, pp. 152–156.
5. E. Gariboldi, B. Previtali (2005), "High Tolerance Plasma Arc Cutting Of Commercially Pure Titanium" *Journal of Materials Processing Technology*, vol.160, P77–89.
6. R. Bini, B.M. Colosimo, A.E. Kutlu, M. Monno (2008), "Experimental study of the features of the kerf generated by a 200 A high tolerance plasma arc cutting system" *Journal of Materials Processing Technology* 345–355.
7. Subbarao Chamarthi, N. Sinivasa Reddy, Manoj Kumar Elipey, D.V Ramana Reddy, (2013), "Investigation Analysis of Plasma arc cutting Parameters on the Unevenness surface of Hardox-400 material" *Trans. Procedia Engineering*, vol. 64, pp. 854–861.
8. K. Salonitis, S. Vatosios (2012), "Experimental Investigation of the Plasma Arc Cutting Process" *Procedia CIRP*, vol. 3 (2012), pp. 287–292.
9. Tetyana Kavka, Alan Maslani, Milan Hrabivsky, Thomas Stechre, Heribert Pauser, (2013), "Experimental Study Of Effect Of Gas Nature On Plasma Arc Cutting Of Mild Steel" *Journal of physics D: appl. Phys*, vol. 46, pp. 1–13.
10. Iosub A, Nagit G and Negoescu F. Plasma cutting of com-poseite materials. *Int J Mater Form* 2008; 1: 1347–1350.2