

Waste Segregation Using Image Processing

Anuradha Raut¹, Satvika Konde², Pankaj Bhandare³, Shrutika Baikar⁴,
Swati Dalvi⁵, J.J. Bandal^{16,*}

Abstract

The increasing waste generation rate necessitates effective waste management, as unmanaged waste poses significant harm to humans and the environment, causing climate changes and hindering national financial development. An automated waste segregation system is crucial to avoid these issues and reduce recycling complexity. Waste cannot be fully appreciated in terms of its significance and financial value until it is separated. A suggested smart waste sorting system uses image processing-based software along with hardware. The system aims to efficiently sort waste, making it easier for groups to segregate them on a large scale. The hardware includes a Raspberry PI, sensors. The ultimate goal is automatic segregation of waste. The implementation of an automated waste segregation system is a crucial measure in mitigating the increasing rates of trash generation that present significant hazards to the environment and human health. Unmanaged trash not only impedes the advancement of the national economy but also adds to climate change. Effective waste segregation is the new paradigm that is required in light of waste management's importance and cost consequences.

Keywords: Sensors, Raspberry PI, Waste, Human Health, Automated

INTRODUCTION

The management of solid and hazardous waste include gathering, moving, handling, and getting rid of different kinds of trash in a way that has the least negative effects on the environment and public health. There are two types of waste management system-

- **Solid Waste:** Solid waste includes everyday items like packaging, food scraps, and old furniture.
- **Hazardous Waste:** Hazardous waste includes materials like chemicals, batteries, and electronic devices that can pose a threat to health or the environment if not properly managed (Figure 1).

Effective waste management practices include recycling,, composting, and proper disposal in landfills or through specialized treatment facilities. Governments and organizations around world implement regulations and programs to manage solid and hazardous waste, aiming to reduce waste generation, promote recycling, and ensure the safe handling of hazardous materials.

*Author for Correspondence

J.J. Bandal

E-mail: amol2184@gmail.com

¹Professor, Department of Mechanical Engineering, Symbiosis Skills & Professional University Pimpri-Chinchwad, Maharashtra,

²⁻⁶Student, Department of Mechanical Engineering, Symbiosis Skills & Professional University Pimpri-Chinchwad, Maharashtra, India

Received Date: May 20, 2024

Accepted Date: June 20, 2024

Published Date: July 15, 2024

Citation: Anuradha Raut, Satvika Konde, Pankaj Bhandare, Shrutika Baikar, Swati Dalvi, J.J. Bandal. Waste Segregation Using Image Processing. International Journal of Environmental Noise and Pollution Control. 2024; 2(1): 20–27p.

The process by which garbage is divided into distinct components is known as waste segregation. In this study, the trash objects are identified through the use of algorithms for image processing. There are two categories for these items: renewable and non-recyclable. The main goals are to separate the garbage according to its type and offer a practical method of treatment.



Figure 1. Waste management.

LITERATURE SURVEY

- i. Prabhakar Khandait, Minal Patil, and Abhishek Madankar created the Automated Waste Segregation System and associated method for producing ethanol. A programmed waste segregator that aims to isolate losses at the transfer level itself is proposed in this research [1].
- ii. S. Mrinal, S. Nandhini Sharma Balachandran Naveen The development of electronically aided automatic trash segregation was done by K. Suryanarayana and D. S. Harish Ram. This paper uses an infrared sensor to determine if the waste bin is full [2].
- iii. Manisha Jayson introduces the automated garbage collection and segregation system, SmartBin. The bin has servo motors, a moisture sensor, an IR sensor, and a GSM module. The procedure is managed by the Arduino Mega 2560 [3].
- iv. Himadri Nath Saha proposed an IoT-based garbage monitoring and clearance alert system, using cloud technology to manage remote area waste and perform midway screening for temperature, dampness, smoke, and fire detection [4].

WORKING

Solid and hazardous waste segregation using image processing involves several steps:

Image Acquisition: Images of the waste are captured using cameras placed at strategic locations in the waste processing facility.

Pre-processing: To improve their quality and prepare them for additional analysis, the captured images are pre-processed. Tasks like image scaling, improvement of contrast, and noise reduction may be part of this.

Object Detection: To find objects throughout the image, image processing algorithms are utilized.

Pictures: In the context of waste segregation, this step involves identifying different types of waste materials present in the image.

Classification: Once objects are detected, they are classified into different categories based on their visual characteristics. For example, organic waste, plastic waste, metal waste, etc., can be classified based on color, shape, texture, etc.

Decision Making: Based on the classification results, decisions are made regarding how to segregate the waste. For example, a conveyor belt may be directed to move items classified as plastic waste to a different processing area than items classified as metal waste.

Feedback Loop: The system may include a feedback loop where the accuracy of the segregation process is evaluated. This feedback can be used to improve the performance of the image processing algorithms over time [5–7].

By using image processing techniques, solid and hazardous waste segregation can be automated, leading to more efficient and accurate segregation processes. This can lessen the negative effects of garbage disposal on the environment and increase recycling rates.

MATERIAL USED

Raspberry Pi

The Raspberry Pi is a small, reasonably priced computer that may be used to automate a variety of processes and boost productivity in trash processing and segregation (Figure 2). By incorporating Raspberry Pis, material processing systems can be configured to routinely separate recycling. It can distinguish between different forms of waste and sort it into distinct bins using sensors like cameras, infrared sensors, or weight sensors [8]. The Raspberry Pi's network connectivity makes it possible to remotely monitor and manage waste processing plants. Because of this, operators can improve operating efficiency and decrease downtime by remotely accessing equipment status, adjusting settings, and troubleshooting difficulties. Here's how it can work:



Figure 2. Raspberry Pi.

Sensors Integration: Raspberry Pi can be connected to various sensors (e.g., ultrasonic sensors, infrared sensors) to detect the presence and quantity of waste in different bins.

Image Recognition: Raspberry Pi can use cameras and image recognition software to identify different types of waste materials, helping in proper segregation.

Data Processing: Raspberry Pi can process data from sensors and cameras to make decisions, such as activating mechanical arms to sort waste or alerting operators about anomalies.

Communication: Raspberry Pi can be connected to the internet to send data to a central system or receive instructions, enabling remote monitoring and control.

Automation: Raspberry Pi can automate tasks such as opening/closing bin lids, activating conveyor belts, or sorting mechanisms based on the detected waste type [9].

Data Logging and Analysis: Raspberry Pi can log data over time, allowing for analysis of waste generation patterns and optimization of segregation processes.

In hazardous waste processing, Raspberry Pi can play a crucial role in ensuring that hazardous materials are segregated properly to minimize risks to human health and the environment. It can monitor parameters such as temperature, pressure, and chemical composition to ensure compliance with safety regulations.

Servo Motor

Servo motors can be used in solid and hazardous waste management in various ways, primarily in automated systems for sorting, handling, and processing waste (Figure 3). Servo motors are essential parts of robotic arms that are utilized in applications related to waste management. Robots can reliably and precisely pick up, manage, and carry a variety of waste products thanks to these motors, which offer precise control over the arm's actions. Servo motor-driven robotic trash handling systems minimize the danger of accidents in hazardous waste situations by operating either autonomously or under remote supervision. Conveyor belts and other material handling machinery at waste management facilities are driven by servo motors, which make it easier for waste products to move smoothly and continuously down the processing line. Servo motors provide effective throughput and optimal usage of processing equipment by modifying the conveyor belts' speed, direction, and position. This boosts productivity and lowers operating expenses. Here are a few examples:

Automated Sorting Systems: Servo motors can be integrated into automated sorting systems to separate recyclable materials from non-recyclable waste based on their physical properties or composition.

Overall, servo motors play a crucial role in improving the efficiency and effectiveness of solid and hazardous waste management processes by enabling precise control and automation.



Figure 3. Servo motors.

USB Camera

USB cameras can be used in solid and hazardous waste management systems in various ways, including (Figure 4):

Monitoring and Surveillance: USB cameras can be used to monitor waste collection sites, landfill areas, and recycling facilities. This helps in ensuring that proper waste segregation and handling practices are followed.

Quality Control: Cameras can be used to inspect the quality of waste materials, ensuring that hazardous and non-hazardous waste is separated correctly.

Safety and Security: Cameras can enhance the safety and security of waste management facilities by monitoring activities and identifying potential hazards.

Remote Monitoring: USB cameras can enable remote monitoring of waste management operations, allowing managers to oversee operations from a distance.

Documentation and Reporting: Cameras can be used to document waste management processes and activities, providing visual evidence for reporting and compliance purposes.



Figure 4. USB cameras.

32 gb Memory Card

Using a 32 GB memory card in a solid and hazardous waste management system can be helpful for storing various types of data (Figure 5). Here are a few possible applications for it:

Data Logging: Recording and storing data from sensors that monitor waste levels, temperatures, or other environmental factors.

Documentation: Storing documentation, such as permits, safety procedures, and waste analysis reports.

Images and Videos: Storing visual data, such as images or videos of waste handling processes or incidents for analysis or reporting.

Backup: Storing important data in an alternate location in case the primary system fails or experiences other problems.

Software and Firmware Updates: Storing software or firmware updates for the waste management system.



Figure 5. 32 gb Memory Card.

Female to female Connector

Equipment Connections: Waste management systems often involve various types of equipment, such as pumps, filters, and separators. Female-to-female connectors can be used to connect different pieces of equipment, allowing for flexibility in the system design (Figure 6).

Sampling and Monitoring: In some cases, connectors are used for sampling or monitoring purposes. Female-to-female connectors can be used to connect sampling devices or monitoring equipment to the waste management system.

Maintenance and Repair: During maintenance or repair activities, connectors may need to be replaced [10:14 PM, 3/14/2024] Anuradha Raut: Female-to-female connectors can be used to replace damaged connectors, restoring the integrity of the system.

Overall, female-to-female connectors play a crucial role in waste management systems, ensuring efficient operation and environmental safety.



Figure 6. Equipment Connections.

HDMI to VGI Adapter

Using an HDMI to VGA adapter in solid and hazardous waste management systems would be quite uncommon, as these adapters are typically used for connecting video devices like laptops or gaming consoles to VGA monitors or projectors (Figure 7).

However, in a hypothetical scenario where such an adapter might be used, it could be for connecting a monitoring or control system that uses HDMI output to a display or control interface that only accepts VGA input. For example, a monitoring system in a waste management facility might have HDMI output, but the control interface in use might only accept VGA input.

In general, though, the use of HDMI to VGA adapters is more common in IT or AV setups rather than in waste management system.



Figutr 7. HDMI to VGA adapter.

PROPOSED METHOD

Implementation

The main objective of this paper is segregation of waste based on solid and hazardous waste by using Raspberry PI.

A servo motor, consisting of a gearbox and potentiometer, allows precise shaft position control and holds it in place using a single control signal, restricted to 0 to 180 rotations (Figure 8).

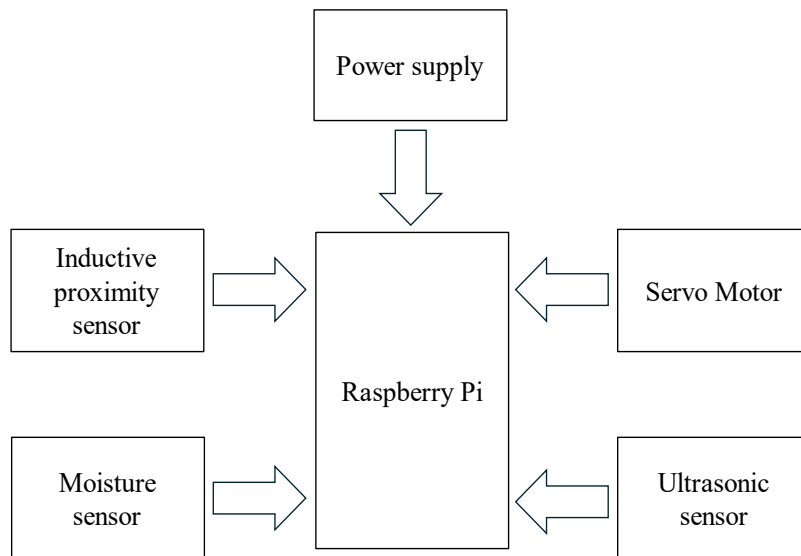


Figure 8. System Design.

CONCLUSION

This paper proposed Rasperrypi approach simplifies waste segregation at the source level, reducing human interaction and pollution caused by improper waste management.

FUTURE SCOPE

The most urgent problem with waste separation in the future will be simultaneous disposal. The waste segregator can be modified to safely separate biological waste produced at home, separate paper and plastic, condense and beautiful mechanical layout

REFERENCES

1. Abhishek Madankar; Minal Patil; Prabhakar Khandait developed Automated Waste Segregation System and its approach towards generation of Ethanol. In this paper proposed a programmed waste segregator that goes for isolating the loss at the transfer level itself.
2. S Nandhini; Sharma S Mrinal; Naveen Balachandran; K. Suryanarayana; D. S. Harish Ram developed Electronically assisted automatic waste segregation. In this paper IR sensor senses whether the waste bin is filled or not.
3. Manisha Jayson present SmartBin, an automatic waste segregation and collection system. The bin is equipped with a GSM module, IR sensor, servo motors, and moisture sensor. The Arduino Mega 2560 controls the process.
4. Himadri Nath Saha proposed an IoT-based garbage monitoring and clearance alert system, using cloud technology to manage remote area waste and perform midway screening for temperature, dampness, smoke, and fire detection.
5. Pawar, S. S., Pise, S., Walke, K., & Mohite, R. (2018, August). Smart garbage monitoring system using AVR microcontroller. In *2018 Fourth International Conference on Computing Communication Control and Automation (ICCUBEA)* (pp. 1-4). IEEE.
6. Raaju, V. A., Meeran, J. M., Sasidharan, M., & Premkumar, K. (2019, March). IOT based smart garbage monitoring system using ZigBee. In *2019 IEEE International conference on system, computation, automation and networking (ICSCAN)* (pp. 1-7). IEEE.
7. Husni, N. L., Prihatini, E., & Silvia, A. (2019, October). Garbage monitoring and warning system. In *2019 International Conference on Electrical Engineering and Computer Science (ICECOS)* (pp. 171-175). IEEE.

-
8. Swain, K. B., Santamanyu, G., & Senapati, A. R. (2017, May). Smart industry pollution monitoring and controlling using LabVIEW based IoT. In *2017 third international conference on sensing, signal processing and security (ICSSS)* (pp. 74-78). IEEE.
 9. Ray, S., Tapadar, S., Chatterjee, S. K., Karlose, R., Saha, S., & Saha, H. N. (2018, January). Optimizing routine collection efficiency in IoT based garbage collection monitoring systems. In *2018 IEEE 8th annual computing and communication workshop and conference (CCWC)* (pp. 84-90). IEEE.