

## Xypher Bot: Autonomous Surveying Robot

Utkarsh Tripathi<sup>1</sup>, Manas Tripathi<sup>2\*</sup>, Sheetal Prajapati<sup>2</sup>, Dhyan Chandra Yadav<sup>2</sup>

### Abstract

*Xypher Bot is a fully autonomous robot built to carry out tasks like height measurement, estimating distance, and detecting objects. It uses affordable and easily available components such as the MPU6050 sensor, ultrasonic sensors, and a laser pointer. By using simple trigonometry, the bot can measure object height with good accuracy. The top part of the bot, which is responsible for height measurement, has already been built and tested. The design and working plan for the lower body movement system are ready, but the actual hardware is yet to be built. This study talks about how the bot is made, how it works, and where it can be useful especially in surveying, monitoring the environment, and automation. A feature to send live data through a Telegram bot is also planned. The Xypher Bot addresses existing limitations through a combination of robotic mobility, real-time mapping sensors, and intelligent navigation algorithms. Equipped with LiDAR, GPS, and ultrasonic sensors, the robot autonomously traverses complex environments, collects high-resolution spatial data, and generates precise topographical maps. Its onboard AI-based path-planning and obstacle-avoidance systems ensure smooth and efficient operation without human intervention. The collected data can be seamlessly integrated with GIS and CAD platforms for advanced analysis and modeling. Experimental results demonstrate that the Xypher Bot significantly reduces survey time while improving accuracy and consistency compared to traditional methods. This innovation represents a step toward fully automated and intelligent surveying systems applicable in civil engineering, urban planning, mining, and environmental monitoring.*

**Keywords:** Autonomous robot, height measurement, laser pointer, object detection, surveying

### INTRODUCTION

The process of measuring height and distance manually can be slow and prone to errors. To make this process easier and more accurate, we built Xypher Bot, a fully autonomous robot that can detect objects, measure height, and estimate distance on its own. The system incorporates readily available components such as the MPU6050 sensor, ultrasonic sensors, and a laser module. These hardware elements are combined with fundamental trigonometric principles to compute object heights with

improved accuracy. The upper module of the bot, responsible for height measurement, has been successfully constructed and experimentally validated. The lower module, currently in the design phase, is intended to provide autonomous mobility and laser alignment functionality. This unit integrates computer vision techniques including edge detection, grayscale conversion, Gaussian blurring, and HSV color filtering to identify object boundaries and align the laser to the target's base with minimal manual intervention.

In addition, the system design includes a provision for real time data transmission through the Telegram messaging platform, enabling users to

#### \*Author for Correspondence

Manas Tripathi  
E-mail: manastripathi1513@gmail.com

<sup>1</sup>Student, Department of Computer Science & Engineering, Babu Banarasi Das University, Lucknow, Uttar Pradesh, India

<sup>2</sup>Assistant Professor, Department of Computer Science & Engineering, Babu Banarasi Das University, Lucknow, Uttar Pradesh, India

Received Date: September 15, 2025


Accepted Date: October 15, 2025

Published Date: October 26, 2025

**Citation:** Utkarsh Tripathi, Manas Tripathi, Sheetal Prajapati, Dhyan Chandra Yadav. Xypher Bot: Autonomous Surveying Robot. International Journal of Advanced Robotics and Automation Technology. 2025; 3(2): 49–62p.

receive field data remotely. This feature enhances the bot's applicability in areas where direct human access may be limited or unsafe. Given its modular architecture, sensing capabilities, and proposed communication support, Xypher Bot is well-suited for applications in land surveying, environmental data collection, and autonomous infrastructure monitoring. The development aims to reduce manual workload, increase precision, and provide a scalable solution for measurement-based automation tasks (Figure 1).

Xypher Bot operates through two main modules: the upper module measures height using MPU6050, ultrasonic sensor, and a laser pointer with trigonometric calculations; the lower module, under development, uses computer vision for edge detection and laser alignment. A Telegram bot is proposed for real-time data updates.

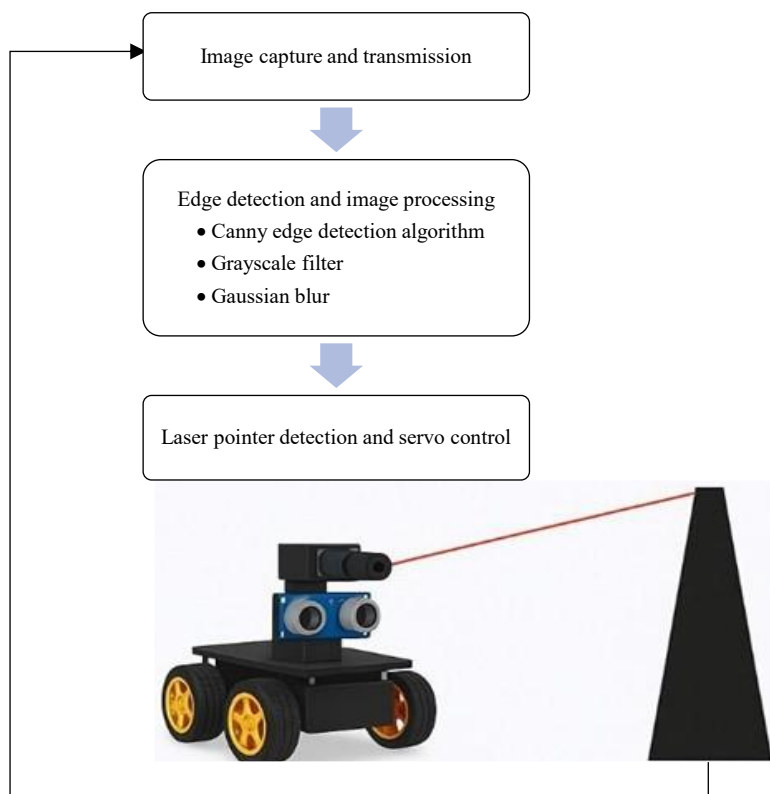

**Figure 1.** Short flow diagram of how Xypher Bot works.

The discussion begins with the motivation and background behind the development of Xypher Bot. It is followed by an overview of related research and existing technologies in the domain of autonomous surveying. The subsequent sections detail the design methodology, covering hardware components and sensor integration. Experimental procedures and real-world testing outcomes are then analyzed. The final section highlights key observations and outlines possible directions for future improvements.

## LITERATURE REVIEW

Recent research in autonomous robotics has focused on low-cost systems for object detection, measurement, and navigation. Many obstacle-avoiding robots use ultrasonic sensors with microcontrollers like Arduino Uno, achieving effective performance in diverse conditions. These studies show that even single-sensor setups can enable reliable movement and object avoidance [1].

MPU6050 with ultrasonic sensors were explored to calculate object height using trigonometric methods. While effective, issues like sensor drift highlight the need for proper calibration and filtering [2].

Computer vision techniques such as edge detection, grayscale conversion, and HSV filtering have been applied for object alignment and tracking. Though useful, these methods often struggle with lighting changes and complex backgrounds, limiting real-world use [3, 4].

Most prior systems either focus on navigation or measurement, not both. Xypher Bot bridges this gap by integrating affordable sensors with computer vision and real time communication features, offering a multifunctional solution for autonomous field operations.

### Existing Technologies in object Detection and Measurement

- *Manual methods*: Measuring tapes and theodolites, which are prone to human errors.
- *LiDAR-based systems*: High-precision but costly.
- *Computer Vision-Based Techniques*: Efficient for detection but lack height estimation capabilities [5–10].
- *Boston dynamics' spot with LiDAR*: A quadruped robot that uses LiDAR for terrain mapping, structure scanning, and autonomous navigation (Figure 2) [11].
- *DJI matrice300 RTK*: A drone with RTK positioning and LiDAR for precise height estimation and mapping.

### OBJECTIVES AND HYPOTHESES

#### Objectives

- To develop a fully autonomous robot capable of measuring object height and estimating distance using low-cost components.
- To implement computer vision techniques for edge detection and laser alignment.
- To ensure accurate and reliable measurements using trigonometric calculations.
- To enable real-time data transmission via Telegram for remote monitoring.



**Figure 2.** Boston dynamics spot.

#### Hypotheses

- The integration of simple trigonometric logic with low-cost sensors can provide accurate height measurements.

- Computer vision methods can effectively assist in automatic edge detection and laser alignment.
- Real-time data sharing through Telegram can improve usability and field efficiency.

## METHODOLOGY

Xypher Bot's functionality is divided into two main modules: height measurement and autonomous navigation. The upper module is equipped with sensors such as the MPU6050, ultrasonic sensor, and a laser pointer to detect the angle and distance of the target object. Using basic trigonometric calculations, the system computes the height with precision.

The lower module, currently in the design phase, incorporates computer vision techniques such as edge detection, grayscale conversion, Gaussian blur, and HSV filtering to detect the edge of objects and align the laser automatically. Data communication is proposed through a Telegram bot, allowing real-time updates to the user.

### UPPER PART (LASER BASED VERTICAL HEIGHT MEASURING ROBOT)

A laser-based vertical height measuring robot is designed to calculate object height using basic sensors and simple geometry. It uses a laser pointer fixed on a servo motor to point at the top of the object, while an MPU6050 sensor measures the tilt angle. At the same time, an ultrasonic sensor calculates the distance from the bot to the base of the object. With the angle and base known, the hypotenuse is found using trigonometric functions. Then, applying the Pythagorean theorem, the robot accurately determines the vertical height [12–15].

#### Working Principle

A laser-based vertical height measuring robot calculates the height of an object using a combination of a laser pointer, an angle sensor (MPU6050), and a distance sensor (ultrasonic sensor).

#### Laser Alignment

- A laser pointer is mounted on a servo motor that tilts vertically.
- The MPU6050 sensor (gyroscope + accelerometer) measures the tilt angle of the laser.
- The laser is manually or automatically aligned to the top (tip) of the object.

#### Measuring the Base Distance

- An ultrasonic sensor measures the horizontal distance (base) from the robot to the bottom of the object.

#### Height Calculation (Using Trigonometry)

- The MPU6050 provides the angle ( $\theta$ ) between the ground and the laser line pointing at the object's tip.
- With this angle and the base distance, the slant (hypotenuse) can be calculated using:  

$$\cos(\theta) = \text{base} / \text{hypotenuse}$$

$$\Rightarrow \text{hypotenuse} = \text{base} / \cos(\theta) \tag{1}$$
- Then, using the Pythagorean theorem:  

$$\text{height}^2 = \text{hypotenuse}^2 - \text{base}^2 \tag{2}$$
- The height (perpendicular from base to tip) is the final result.

#### Output

The perpendicular height, distance of object from the bot and angle are displayed in Figure 3.

#### Lower Part (Autonomous Robot)

When Xypher Bot spots an object using its ultrasonic sensors, it pauses at a safe distance to get accurate readings. From there, it takes a photo of the object using its built-in camera [16].

The photo goes through basic image processing: first identifying the edges using the Canny Edge Detection method and then converting the image to grayscale to bring out details. A slight blur is added to cut down any extra noise in the image.

After the edges are clear, the laser pointer is switched on. The system uses color filtering (HSV thresholding) to spot the red laser dot. It then combines this with the edge data and moves the servo motors to point the laser exactly at the top edge of the object.

Once everything lines up, the bot calculates the height and sends the result along with the images to the user through Telegram. It then moves on to the next object and repeats the same process (Figures 4 and 5).

## **EXPERIMENTAL SETUP AND CURRENT DEVELOPMENT**

### **Laser Pointer Adjustment System: Information Flow**

The automatic laser alignment system in Xypher Bot is designed to detect an object's edge (specifically the tip) and align a servo mounted laser pointer to that exact point using a feedback loop.

The flow of operations is as follows:

#### ***Image Acquisition***

- A live video feed is captured using a camera module (e.g., Raspberry Pi Camera or USB webcam).
- Each frame is processed in real-time for analysis.

#### ***Pre-Processing***

- The captured image is converted to grayscale to simplify the data.
- A Gaussian Blur is applied to reduce noise and smooth the image.
- The smoothed image is then passed through the Canny Edge Detection algorithm to identify object boundaries.

#### ***Object Tip Detection***

- Contours are extracted from the edge-detected image using `cv2.findContours()`.
- The topmost point (or any specified extreme point) on the detected contour is identified as the target (object tip) for laser alignment.

#### ***Laser Dot Detection***


- Once the laser pointer is turned on, the system applies HSV (Hue, Saturation, Value) color space conversion to the original RGB image.
- A color thresholding technique is used to isolate the red laser dot.
- The center coordinates of the red dot are computed using contour analysis or image moments.

#### ***Error Calculation***

- The system calculates the positional error between the current laser dot position and the target edge tip:  
Error  $x = x_{\text{laser}} - x_{\text{tip}}$   
Error  $y = y_{\text{laser}} - y_{\text{tip}}$

Where,


- $x_{\text{laser}}$  and  $y_{\text{laser}}$  are the coordinates of the laser dot.
- $x_{\text{tip}}$  and  $y_{\text{tip}}$  are the coordinates of the object's edge tip.

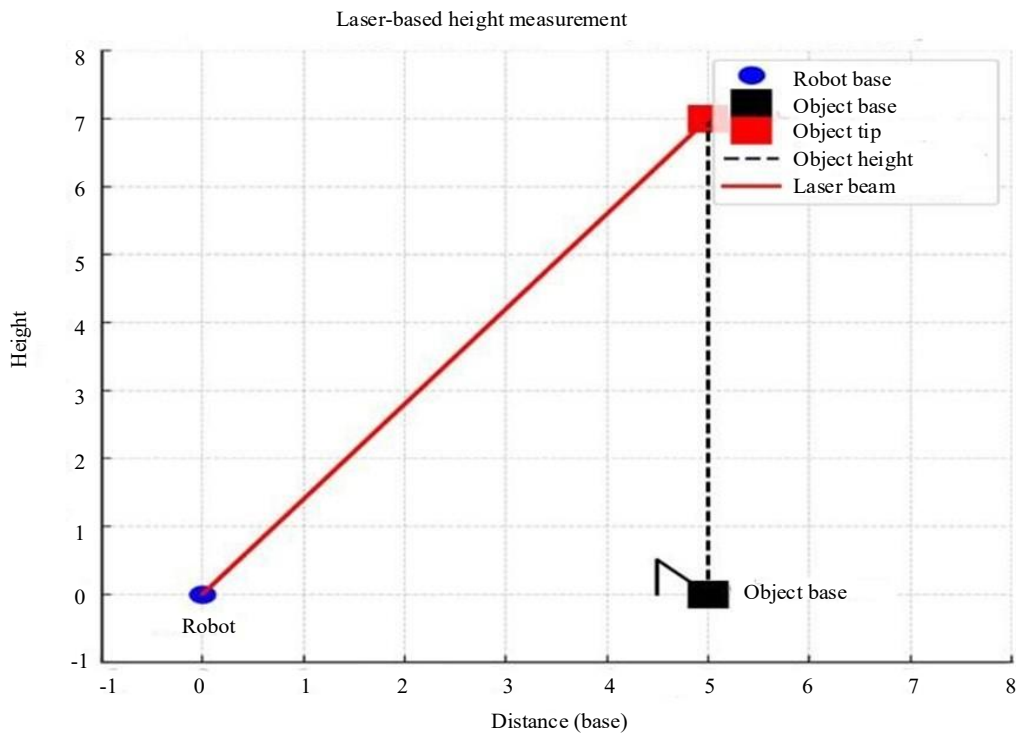

**Figure 3.** Working principle of upper part.



**Figure 4.** Real image to grayscale image.

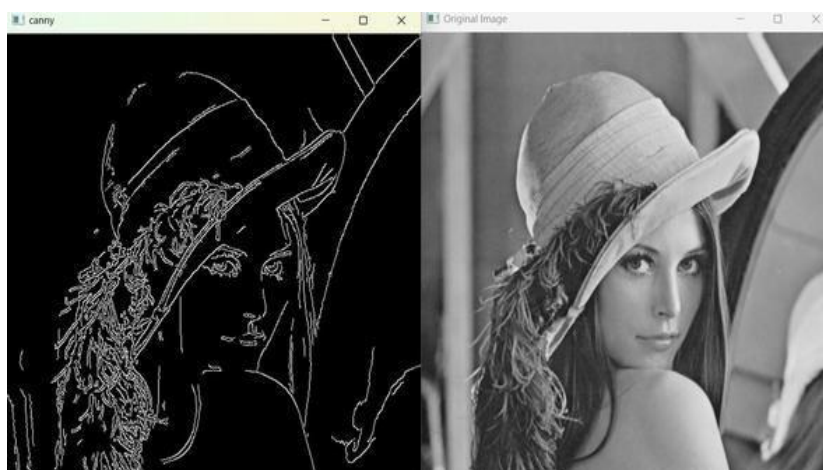

**Figure 5.** Canny edge algorithm.

*Xypher Bot = Upper Part + Lower Part (Laser Based Vertical Height Measuring Robot + Autonomous Vehicle) [5, 9].*

### ***Servo Adjustment***

- Based on the calculated error, corresponding servo angles are adjusted to shift the laser pointer.
- A mapping function converts pixel distance into angular displacement.
- The servo continues adjusting until the error is minimized below a defined threshold [5].

### ***Feedback Loop Execution***

- The above steps are executed in a continuous loop, forming a real-time feedback system.
- Optional techniques like PID control and positional averaging are incorporated to enhance smoothness and accuracy.

### ***Output***

- The laser pointer is automatically aligned to the object's edge tip with high precision.
- This system enables intelligent, vision-based pointing which can be extended for object marking, precision measurement, and other surveying tasks (Figure 6).

## **System Enhancement and Challenges**

### ***Mapping and Localization with SLAM***


For Xypher Bot, to operate autonomously in real environments, it is essential to integrate a mapping and localization system. This can be achieved by implementing SLAM (Simultaneous Localization and Mapping). The approach involves using wheel encoders for distance tracking and combining their data with the MPU6050 sensor to reduce positional drift. Additionally, visual odometry using a camera module can help estimate the bot's movement by analyzing frame-to-frame changes.

Lightweight SLAM solutions like RTAB-Map or ORB SLAM2, which are compatible with Raspberry Pi, are suitable for our setup. These tools allow the robot to generate maps in real time and navigate with better awareness of its surroundings.

### ***Error Detection and Recovery***

In real world applications, occasional hardware or detection errors are expected. To address this, several handling mechanisms are planned:

- If the laser fails to align with the object edge after a few attempts, the bot will initiate a scanning routine and notify the user through the Telegram interface [6].
- If object detection through image processing fails, it would slightly adjust its position and try again. After a few retries, an error message will be sent.

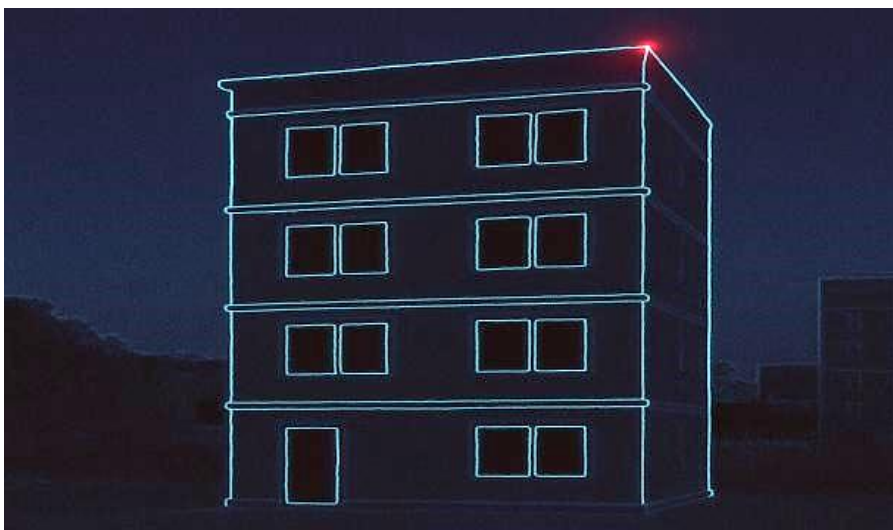

**Figure 6.** HSV visual.

- For sensor failures such as disconnection or unstable readings from the ultrasonic sensor or MPU6050, the bot will attempt automatic reinitialization and pause operations until the issue is resolved [4].

These measures aim to make the system more robust, allowing it to function reliably without constant supervision (Figure 7).

### Summary

By incorporating SLAM for intelligent navigation and establishing structured error handling, Xypher Bot moves closer to becoming a dependable, field-ready solution for automated surveying and measurement tasks.


### Prototype Progress

The top part of Xypher Bot, which handles height measurement, has been built and tested in a basic setup. It uses the MPU6050 sensor, ultrasonic sensor, and a laser pointer to calculate height. The lower part of the bot, which will take care of movement in object detection, is still being designed (Figure 8).



#### Laser pointer adjustment system-information flow

The automatic laser alignment system in Xypher Bot is designed to detect an object's edge (specifically the tip) and align a servo-mounted laser pointer to that exact point using a feedback loop. The flow of operations is as follows:

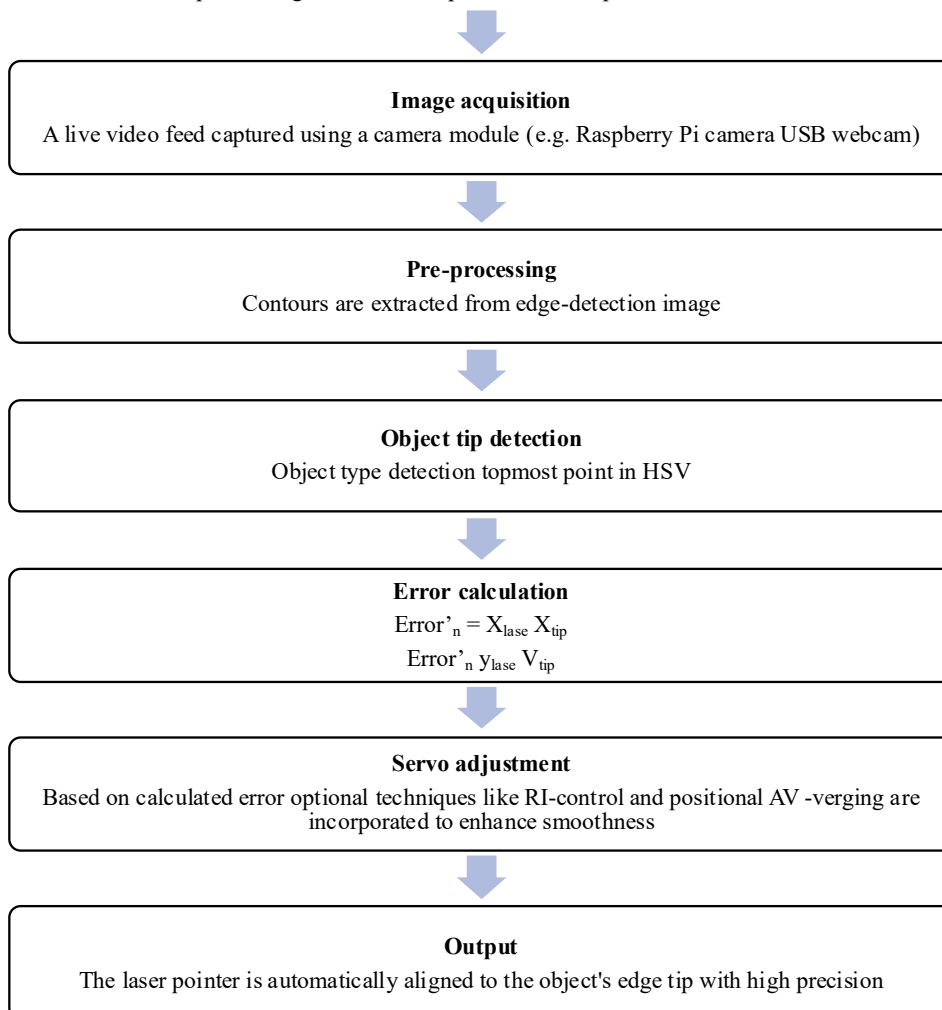

**Figure 7.** Flow of technology used for laser adjustment.



**Figure 8.** Ongoing prototype.

### **Testing Status**

The full bot has not been tested in real-world conditions yet. Final testing will be done once both sections are combined and fully functional.

### **Problems Faced in Upper Part (Laser Based Vertical Height Measuring Robot Plus Autonomous Vehicle)**

- *MPU6050 sensor*: Needs proper setup to get accurate angle readings.
- *Ultrasonic sensor*: Sometimes gives wrong readings, especially on shiny or slanted surfaces.
- *Servo motor*: Laser alignment depends on how smoothly and accurately the servo moves.

### **Justification of Technologies That Are Used**

We used grayscale, Gaussian blur, Canny edge detection, and HSV filtering in Xypher Bot because they work well together to give clear and accurate image results. First, the image is converted to grayscale to make it simple. It removes unnecessary color details and focuses only on brightness, which helps in processing the image faster [1, 2].

Then, we apply Gaussian blur to reduce small noise or random dots that might confuse the bot. It smooths the image a bit so that the edges become clearer.

After that, Canny edge detection is used to find the boundaries of the object. It highlights where the object starts and ends, which is important for pointing the laser exactly at the edge.

Lastly, we use HSV color filtering to find the red dot from the laser pointer. HSV makes it easier to detect specific colors like red, even if the lighting in the area changes. All these steps are used because they are reliable and give us good results when detecting objects and aligning the laser [12].

## SYSTEM REQUIREMENTS

### Hardware Components

The Xypher Bot is developed using a modular hardware setup. The upper body, responsible for vertical height measurement, comprises:

- MPU6050 sensor for tilt angle detection.
- Ultrasonic sensor (HC-SR04) for distance measurement.
- Laser pointer aligned using a servo motor (MG995 metal gear).


The lower body, designed for autonomous navigation and computer vision, consists of:

- Raspberry Pi 4 is the processing unit for vision and control.
- Camera module for capturing images.
- Multiple ultrasonic sensors for obstacle avoidance.
- BTS7960 motor driver for controlling DC geared motors.
- Chassis, wheels, and power supply modules for mobility.

Additional components include jumper wires, voltage regulators, and power sources such as Li-ion battery packs and power banks [10, 15].

### Software Components

- Arduino IDE for microcontroller programming.
- Python with OpenCV and NumPy for image processing tasks.
- Raspberry Pi OS for running the Raspberry Pi unit.
- Telegram Bot API for real-time communication and data sharing (Figure 9).

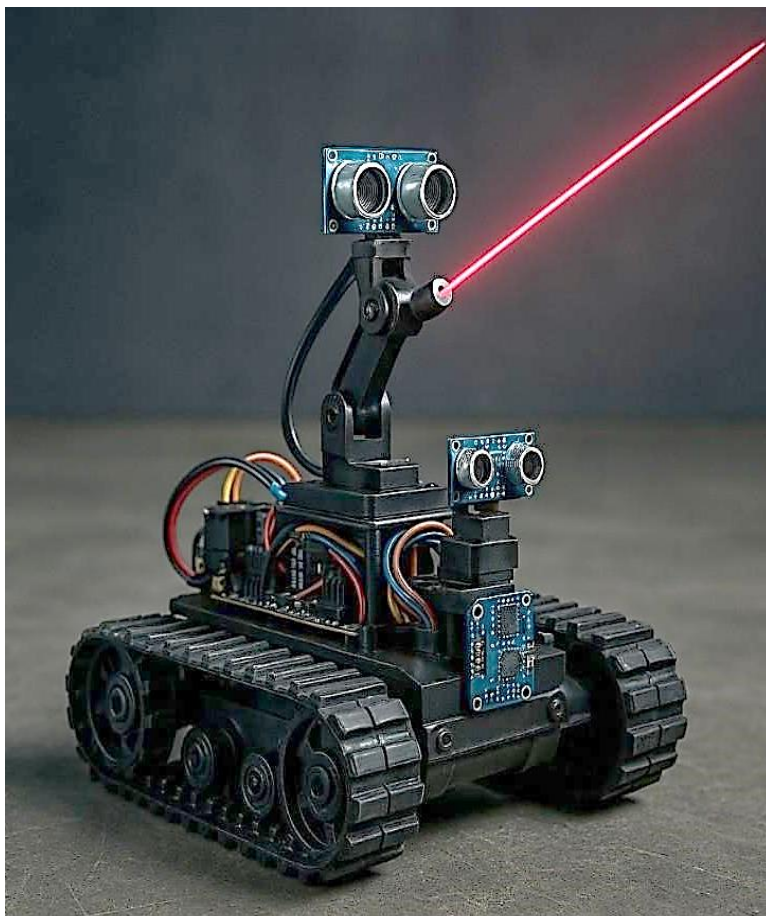

**Figure 9.** AI generated sample Image of Xypher bot.

## RESULTS

The experimental work has so far been carried out only on the height measurement module (upper body) of the Xypher Bot. The system was tested for its ability to calculate the vertical height of objects using the MPU6050 angle sensor, an ultrasonic distance sensor, and a laser pointer mounted on a servo motor [17].

### Height Measurement Test Results

Tests were performed by setting the laser pointer at various angles and recording the base distance using the ultrasonic sensor. The height was then calculated using trigonometric formulas and the Pythagorean theorem (Table 1).

These results show that the system can compute height with consistent accuracy when provided with correct input values.

The relationship between angle, base, and height followed expected trigonometric patterns.

### Image Processing and Navigation (Conceptual Stage)

The lower body of Xypher Bot, which is designed to handle autonomous navigation and image-based laser alignment, is currently under development. While practical implementation is pending, the conceptual framework has been outlined, and initial simulations suggest the following:

- Use of Canny Edge Detection, Grayscale, Gaussian Blur, and HSV Thresholding for processing images and identifying object edges and the laser pointer.
- Integration of ultrasonic sensors for obstacle detection and maintaining safe distance.
- Planned use of servo motors to adjust the laser based on visual feedback.
- Proposal to send processed data and images through Telegram Bot for remote monitoring.

These features remain in the development phase and have not yet been validated through physical tests [7, 8, 14].

## OBSERVATIONS

- The MPU6050 sensor requires careful calibration before every use for consistent angle readings.
- Ultrasonic readings may fluctuate on reflective or irregular surfaces.
- Laser alignment depends on the servo motor's mechanical stability and precision.
- The current setup shows promise for accurate height measurement in controlled indoor environments.

Full system testing including the navigation and image processing capabilities will be conducted in future stages of development.

## DISCUSSION

### Implications

The upper part of Xypher Bot shows that using simple components like an MPU6050, ultrasonic sensor, and laser pointer can help calculate object height accurately. The ability to send results directly through Telegram makes it useful for tasks where quick, contactless measurements are needed.

**Table 1.** Represents experimental results of height measurement.

Trial	Angle (°)	Base distance (cm)	Hypotenuse (cm)	Calculated height (cm)
1	30	50	57.73	28.86
2	45	50	70.71	50.00
3	60	50	100.00	86.60
4	75	50	193.19	186.60

---

## Limitations

The lower part of the bot, which involves movement and image processing, is still in the planning phase. The MPU6050 needs proper calibration to avoid incorrect angle readings, and the ultrasonic sensor may not always work well on shiny or uneven surfaces. So far, the setup has only been tried indoors and might need adjustments for outdoor use.

Future work includes outdoor testing with variable lighting, terrain handling, and long-range detection accuracy calibration.

## Applications of Xypher Bot

### *Surveying and Mapping*

- Xypher Bot can measure the height of buildings, bridges, and landforms without requiring manual effort.
- It can assist in urban planning by providing accurate elevation data for mapping and GIS applications.

### *Forestry and Agriculture*

- The bot can estimate tree heights for forest management and conservation efforts on agriculture, it can help analyze crop growth by measuring plant heights.

### *Environmental Monitoring*

- Used for tracking changes in glacier height, sea levels, and water body elevations. It can assist in climate change research by monitoring terrain shifts over time.

### *Disaster Response and Damage Assessment*

- After natural disasters like earthquakes, floods, or landslides, Xypher Bot can assess damaged buildings and wreckage heights.
- Helps emergency teams in rescue operations by mapping hazardous structures.

### *Architecture and 3D Visualization*

- Helps architects create accurate 3D models of buildings and structures.
- Supports renovation projects by analyzing existing structure heights remotely.

### *Historical Preservation*

- Utilized for the digital documentation of heritage sites and monuments.
- Supports restoration projects by providing precise measurements of old structures (Figures 10 and 11).

## CONCLUSION

Xypher Bot demonstrates a practical and cost-effective approach to measuring object height using an MPU6050 sensor, ultrasonic sensor, and laser pointer. The upper body has been successfully tested, showing accurate results through basic trigonometric calculations.

The lower body, still under development, introduces a concept for autonomous navigation using computer vision and sensor-based alignment. This project highlights the potential of low-cost components for automated field measurements, with future work focusing on full system integration and improved real time operation [10, 13].

## Xypher Bot is Not Just a Project; It is a Vision

A vision to turn ideas into impact, and curiosity into creation. From a gaming-inspired name to real-world applications in surveying, this bot represents how innovation can be born from the most unexpected places.

What started with a basic prototype has grown into a smart, scalable system with real potential in industries like construction, agriculture, and research.

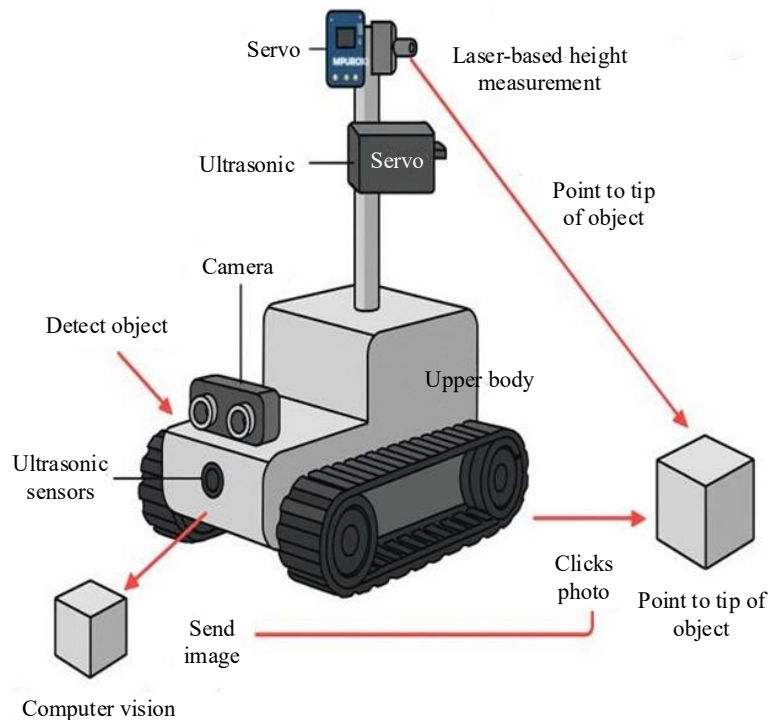


Figure 10. AI generated sample image of Xypher Bot.

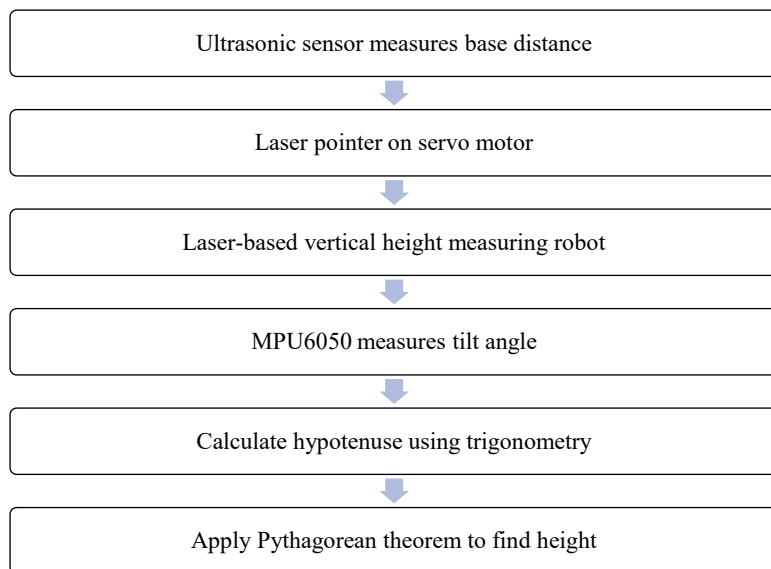


Figure 11. Flowchart of working of Xypher Bot.

## REFERENCES

1. Bradski G. The OpenCV library. Dr. Dobb's J Softw Tools. 2000;120:122–5.
2. Gonzalez RC, Woods RE. Digital Image Processing. 4th Edn. Pearson; New York. 2018.
3. InvenSense. MPU-6000 and MPU-6050 product specification. Revision 3.4. Document No.: PS-MPU-6000A-00. San Jose (CA): InvenSense; 2013 Aug 19. Available from: [https://robu.in/wp-content/uploads/2014/12/GY-87\\_EN.pdf](https://robu.in/wp-content/uploads/2014/12/GY-87_EN.pdf).
4. ELECFREAKS (2019). HC-SR04 Ultrasonic Module User Guide. [online] ELECFREAKS.

- Available from: <https://www.electfreaks.com/blog/post/hc-sr04-ultrasonic-module-user-guide.html>.
5. Infineon Technologies. (2024). BTS 7960: High current PN half bridge NovalithIC. [Online]. Data Sheet, Rev. 1.1. Neubiberg (Germany): Infineon Technologies. Available from: <https://www.infineon.com/assets/row/public/documents/10/57/infineon-bts7960-ds-en.pdf>
  6. Telegram. (2025). Telegram Bot API. [Online] Telegram. Available from: <https://core.telegram.org/bots/api>.
  7. Arduino.cc. (2025). Arduino Uno Board Specifications. [Online] Arduino. Available from: <https://docs.arduino.cc/hardware/uno-rev3/>.
  8. Hinton G, Deng L, Yu D, Dahl G, Mohamed A, Jaitly N, Senior A, Vanhoucke V, Nguyen P, Sainath T, Kingsbury B. Deep neural networks for acoustic modeling in speech recognition: The shared views of four research groups. *IEEE Signal Process Mag.* 2012;29(6):82–97. doi: 10.1109/MSP.2012.2205597.
  9. Marr D, Hildreth E. Theory of edge detection. *Proc R Soc Lond B Biol Sci.* 1980;207(1167):187–217. doi: 10.1098/rspb.1980.0020. PubMed PMID: 6102765.
  10. Ang JH, Min TS. A review on sensor technologies and control methods for mobile robot with obstacle detection system. *Int J Robot Autom Sci.* 2024 Apr 30;6(1):78–85.
  11. Yuan W, Li J, Bhatta M, Shi Y, Baenziger PS, Ge Y. Wheat height estimation using LiDAR in comparison to ultrasonic sensor and UAS. *Sensors (Basel).* 2018;18(11):3731. doi: 10.3390/s18113731. PubMed PMID: 30400154.
  12. Rahman A. Precision and accuracy of ultrasonic and infrared laser ToF IoT sensors. *J Inform Telecommun Eng.* 2025;8(2):219–26.
  13. Ušinskis V, Nowicki M, Dzedzickis A, Bučinskas V. Sensor-fusion based navigation for autonomous mobile robot. *Sensors (Basel).* 2025;25(4):1248. doi:10.3390/s25041248.
  14. Montemerlo M, Thrun S, Koller D, Wegbreit B. FastSLAM: A factored solution to the simultaneous localization and mapping problem. In: *Proceedings of the Eighteenth National Conference on Artificial Intelligence (AAAI-02)*; 2002 Jul 28–Aug 1; Edmonton, Alberta, Canada. Menlo Park (CA): AAAI Press; 2002. p. 593–8.
  15. Mur-Artal R, Tardos JD. ORB-SLAM2: An open-source SLAM system for monocular, stereo, and RGB-D cameras. *IEEE Trans Robot.* 2017;33(5):1255–62. doi: 10.1109/TRO.2017.2705103.
  16. Thrun S, Burgard W, Fox D. *Probabilistic Robotics*. Cambridge (MA): MIT Press; 2005.